



VACUUM
GLAZINGEU

DATA TABLES

Version 3.1 - 024.02.2025

www.vacuumglazingeu.com

WHAT IS VACUUM GLAZING?




Vacuum Glazing is highly efficient double glazing. Like standard double glazing, it is made with two panes of glass separated by a cavity. However, instead of the usual gas or air-filled cavity, all air is extracted, and the unit is completely sealed.

The effectiveness of the vacuum means that the gap between the two panes can be incredibly narrow – around 0.3mm. This narrow gap makes Vacuum Glazing the perfect choice for heritage windows which emulate single glazing. When incorporated into triple glazing, performance is increased without requiring changes to window profiles.


DOUBLE GLAZING



TRIPLE GLAZING

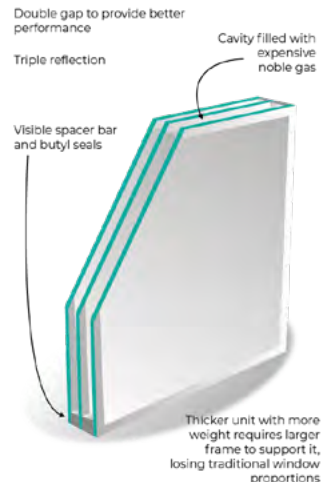

ENHANCE VACUUM GLAZING

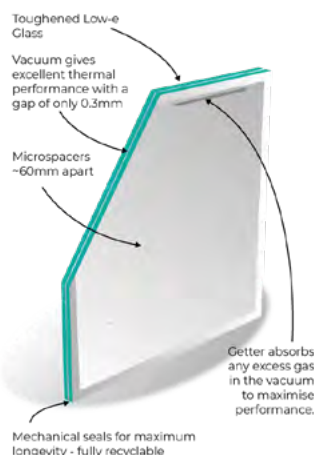

OPTIMUM VACUUM GLAZING



VACUUM GLAZING vs TRADITIONAL GLASS



Even compared to Triple Glazing, Vacuum Glazing has:

- ✓ Higher energy efficiency
- ✓ Noise reduction
- ✓ Better light transmission
- ✓ Slimmer profile
- ✓ Longer Service Life

NOT ALL VACUUM GLASS IS THE SAME





LandVac has:

- ✓ 25 years of accelerated ageing tests with no loss in performance.
- ✓ The lowest U-value of any vacuum glass unit.
The best acoustic value of any vacuum glass unit.
- ✓ No plugs, a neat and effective getter, and a consistent and neat edge seal.
- ✓ Always toughened safety glass as standard.
- ✓ The fewest and least visually distracting micropillars.
- ✓ Environmental product declaration available, and ROHS fully compliant.









THERMAL PERFORMANCE

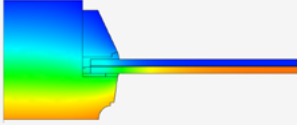Here are some typical performance improvements for different frame materials, based on replacing single glazing with LandVac Enhance.

	Single Glazed (5.4W/m ² K centre pane)	Reglazed with LandVac
Timber Frame	4.41W/m ² K 	1.14W/m ² K 
Steel Frame	5.46W/m ² K 	1.88W/m ² K 

Here are some typical performance improvements for different frame materials, based on replacing early double glazing with LandVac Enhance.

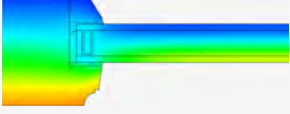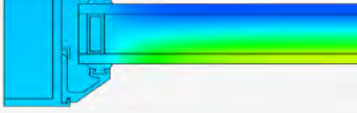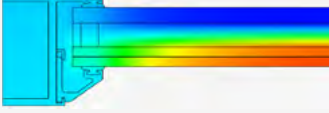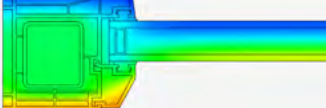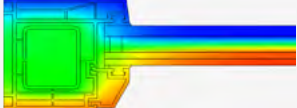	Early Double Glazing (2.8W/m ² K centre pane)	Reglazed with LandVac Optimum (0.4W/m ² K centre pane)
Timber Frame	2.26W/m ² K 	1.01W/m ² K 
Aluminium Frame	3.76W/m ² K 	2.22W/m ² K 
uPVC Frame	2.64W/m ² K 	1.07W/m ² K 

LANDVAC ENHANCE

Perfect for Heritage Restoration Projects and New Build Homes

LandVac Enhance is perfect for heritage and conservation projects. With its slim profile, centre pane U-value of 0.4, and toughened as standard durability, it is the ideal choice for preserving the authenticity of historical windows while enhancing energy efficiency. It is also perfect for newer properties where an historic aesthetic is important.



WHY CHOOSE ENHANCE FOR WINDOW RESTORATION?

- ✓ Lowest sightlines of any toughened vacuum unit
- ✓ Always toughened as standard
- ✓ 8x fewer microspacers than leading competitor
- ✓ Superior U-value and acoustic rating to any vacuum unit
- ✓ Neat and resilient metallic edge seal for longevity and performance
- ✓ Getter placed into glass slot to ensure consistency and quality

Look,
no plugs!



	Single Glazing	Low Sightline Slim Double Glazing	LandVac Enhance Vacuum Glazing
Overall Thickness	4mm	11 - 16mm	8.3mm
U-Value (W/m ² K)	5.8	1.2 - 1.9	0.4 - 0.49
Acoustic Reduction (RW)	25dB	29 - 31dB	36 - 39dB
Estimated Lifespan	50+ years	Less than 5 years	50+ years

STANDARD LOW-E COATING (SINGLE SILVER COATING S1.10)

Suitable for most applications

	U-Value (W/m ² K)	Visible Light Transmittance	SHGC (g-value)	Weighted Sound Reduction Index
*4TL+0.3V+4T	0.41	76%	0.58	36dB
5TL+0.3V+5T	0.41	75%	0.58	37dB
6TL+0.3V+6T	0.41	74%	0.58	39dB

*Figures for this unit have been tested to EN410 and EN674. Other performance data is simulated from this physical testing.

MID RANGE LOW-E COATING (DOUBLE SILVER COATING D80)

For reducing the G-Value in areas moderate solar gain.

	U-Value (W/m²K)	Visible Light Transmittance	SHGC (g-value)	Weighted Sound Reduction Index
*4TL+0.3V+4T	0.40	70%	0.40	36dB
5TL+0.3V+5T	0.40	69%	0.39	37dB
6TL+0.3V+6T	0.40	68%	0.39	39dB

PREMIUM LOW-E COATING (TRIPLE SOLVER COATING S70)

For maximum thermal performance while minimising solar gain.

	U-Value (W/m²K)	Visible Light Transmittance	SHGC (g-value)	Weighted Sound Reduction Index
*4TL+0.3V+4T	0.34	68%	0.32	36dB
5TL+0.3V+5T	0.34	67%	0.31	37dB
6TL+0.3V+6T	0.34	66%	0.31	38dB

SOLAR CONTROL COATING (XDTB0159)

Perfect for roofing or other areas of high solar gain.

	U-Value (W/m²K)	Visible Light Transmittance	SHGC (g-value)	Weighted Sound Reduction Index
5TL+0.3V+4T	0.45	53%	0.33	36dB

ULTRACLEAR WITH SINGLE COATING S1.10

For areas where glass clarity is critical, or areas of lower solar gain.

	U-Value (W/m²K)	Visible Light Transmittance	SHGC (g-value)	Weighted Sound Reduction Index
*4TL+0.3V+4TUC	0.49	83%	0.68	36dB

*Figures for this unit have been tested to EN410 and EN674. Other performance data is simulated from this physical testing.

LANDVAC PROTECT

Perfect for new builds or security conscious restoration projects where slim profile glazing is important.

LandVac Protect is specifically designed to achieve P1A security performance while also offering a slim profile, a centre pane. U-value of 0.4 and toughened durability. It's the ideal choice for authentic windows with extreme energy efficiency and security performance.



WHY CHOOSE LANDVAC PROTECT?

- ✓ Historic appearance with no double reflection.
- ✓ Compliant with building regulations for thermal performance with U-value of 0.4 W/m²K*.
- ✓ P1A laminate performance for compliance with building regulations for security.
- ✓ Neat and resilient metallic edge seal for longevity and performance.
- ✓ Superior Acoustic Performance of 40dB.
- ✓ Slim 13.1mm width

	U-Value (W/m ² K)	Visible Light Transmittance	SHGC (g-value)	Weighted Sound Reduction Index
4TL+0.3V+4T(S1.10)+0.76P+4T	0.41	68%	0.55	40dB
4TL+0.3V+4T(D80)+0.76P+4T	0.40	58%	0.38	40dB
4TL+0.3V+4T (Solar Control) +0.76P+4T	0.40	43%	0.32	40dB
4TL+0.3V+4T (Ultra Clear) +0.76P+4T	0.49	75%	0.65	40dB

*Centre Pane

LANDVAC OPTIMUM

Advanced Glazing for New Builds & Retrofit Projects


Enhanced energy efficiency and aesthetics with high-performance glazing - ideal for new constructions or reglazing existing double-glazed windows and doors.

LandVac Optimum is a hybrid vacuum unit that combines LandVac vacuum glazing with a traditional cavity and an additional glass pane. It can be customised to any configuration of thickness and performance criteria. Local assembly ensures EN1279 compliance with maximum flexibility.



What does it look like in a House?


Here are some thermal camera images after the replacement of older double glazing in a timber frame with LandVac Optimum Glass

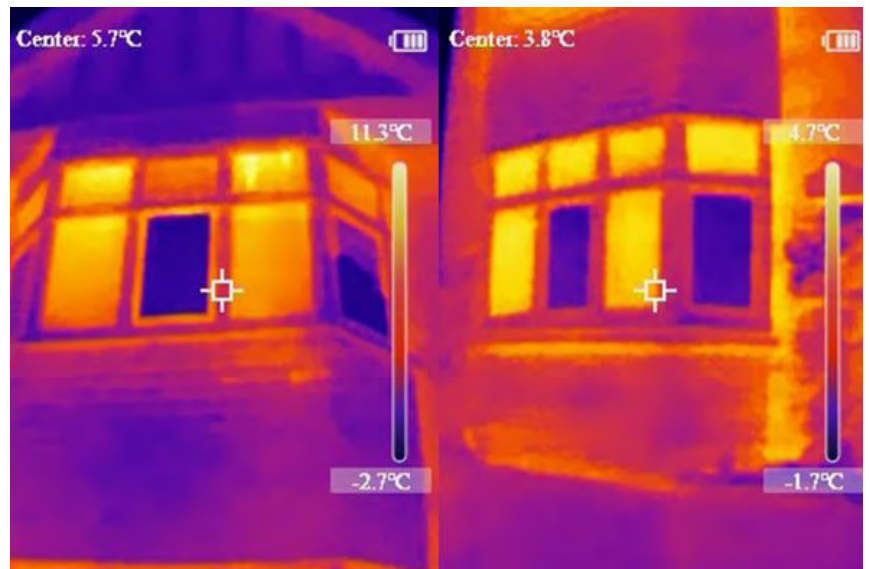

LANDVAC OPTIMUM (Hybrid Vacuum Glass)

	U-Value (W/m ² K)	Visible Light		SHGC (g-value)	Shading Coefficient	Weighted Sound Reduction Index
		Transmittance	Outdoor Reflectivity			
4T+0.3V+4TL (S1.10) + 9Ar + 3 + 0.76P + 3	0.4	72%	18%	0.59	0.68	41dB
4T+0.3V+4TL (D80) + 9Ar + 3 + 0.76P + 3	0.4	63%	19%	0.46	0.53	41dB
4TL (S1.10) + 0.3V+4TL (S1.10) + 9Ar + 3 + 0.76P + 3	0.4	70%	15%	0.48	0.55	41dB
4TL (D80) + 0.3V+4TL (D80) + 9Ar + 3 + 0.76P + 3	0.4	54%	16%	0.32	0.37	41dB

A full range of laminates, coatings, glass types and cavities are available to construct a customised solution. Contact us to start the specification process.

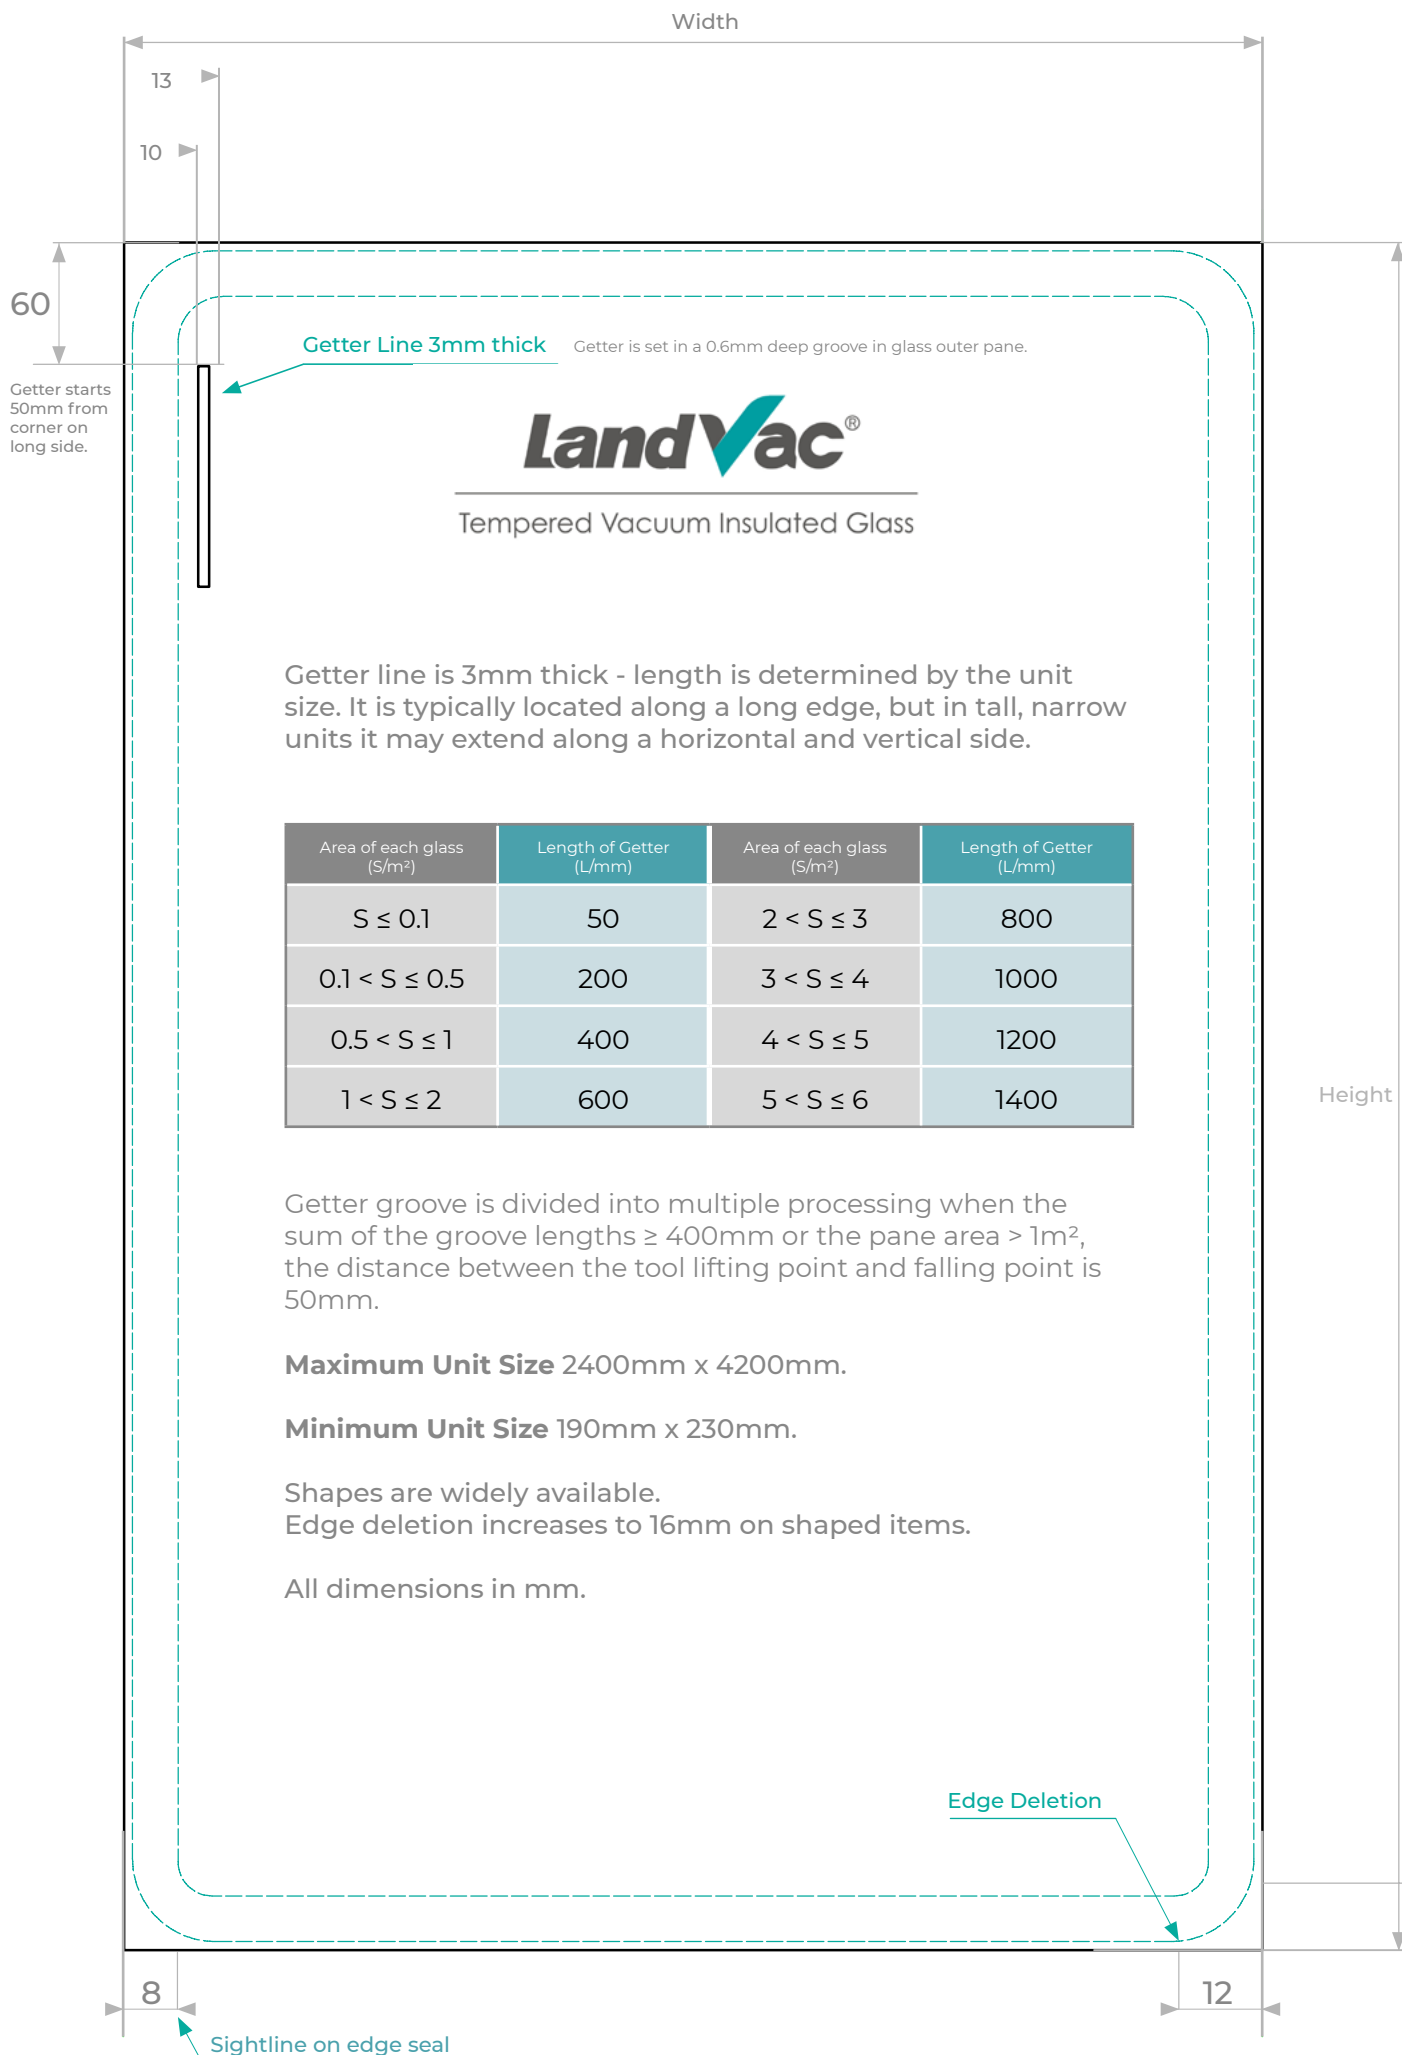

Getter line is 3mm thick - length is determined by the unit size. It is typically located along a long edge, but in tall, narrow units it may extend along a horizontal and vertical side.

Area of each glass (S/m ²)	Length of Getter (L/mm)	Area of each glass (S/m ²)	Length of Getter (L/mm)
$S \leq 0.1$	50	$2 < S \leq 3$	800
$0.1 < S \leq 0.5$	200	$3 < S \leq 4$	1000
$0.5 < S \leq 1$	400	$4 < S \leq 5$	1200
$1 < S \leq 2$	600	$5 < S \leq 6$	1400

Getter groove is divided into multiple processing when the sum of the groove lengths $\geq 400\text{mm}$ or the pane area $> 1\text{m}^2$, the distance between the tool lifting point and falling point is 50mm.

Maximum Unit Size 2400mm x 4200mm.

Minimum Unit Size 190mm x 230mm.


Shapes are widely available.

Edge deletion increases to 16mm on shaped items.

All dimensions in mm.


Shapes Available

Rectangle

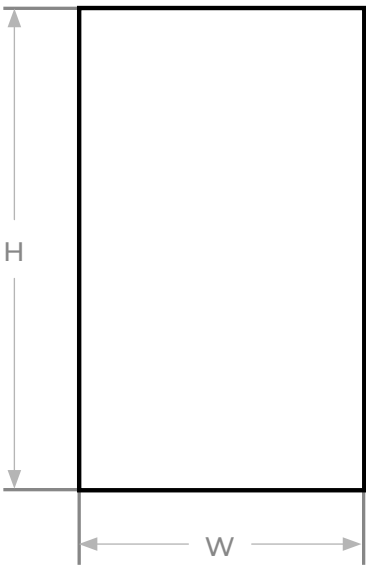


Available Sizes:
 $300 \leq H \leq 2475$
 $300 \leq W \leq 2475$
 $\text{Min } (H \& W) \leq 1475$

Right Angled Trapezoid

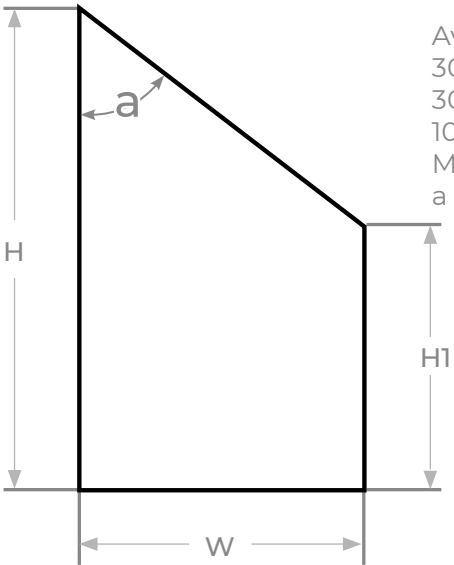


Available Sizes:
 $300 \leq H \leq 1600$
 $300 \leq W \leq 1600$
 $100 \leq H1 \leq H$
 $\text{Min } (H \& W) \leq 1400$
 $a \geq 45^\circ$

Right Angled Triangle

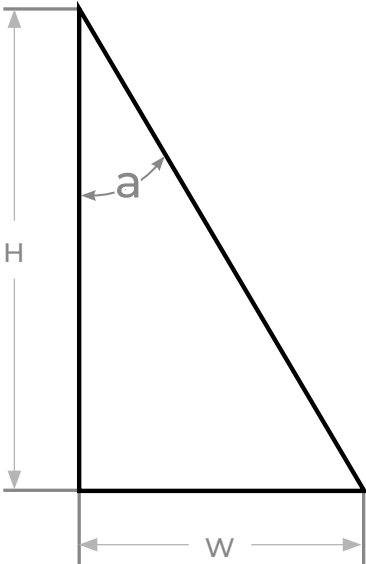


Available Sizes:
 $300 \leq H \leq 1500$
 $300 \leq W \leq 1500$
 $35^\circ \leq a \leq 55^\circ$

Symmetrical Circular Arches

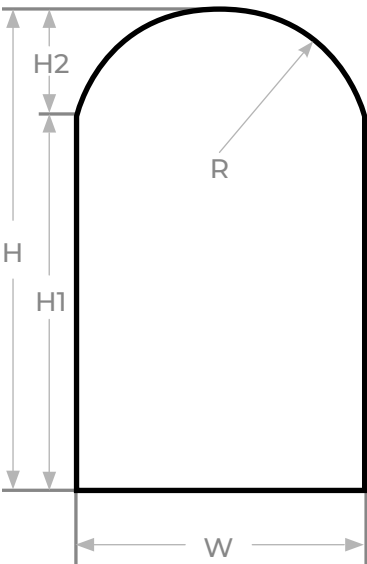

Available Sizes:
 $300 \leq H \leq 1600$
 $300 \leq W \leq 1600$
 $100 \leq H1 \leq H$
 $H2 \leq R$
 $\text{Min } (H \& W) \leq 1400$

Asymmetrical Circular Arches

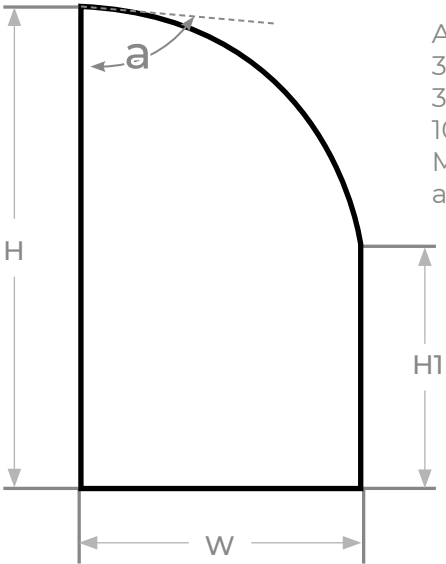

Available Sizes:
 $300 \leq H \leq 1600$
 $300 \leq W \leq 1600$
 $100 \leq H1 \leq H$
 $\text{Min } (H \& W) \leq 1400$
 $a \geq 60^\circ$

All dimensions in mm.

With an impressive annual capacity exceeding 400,000m², LandVac is produced in a cutting-edge Smart Factory, showcasing the scale of its operation. LandGlass, the manufacturer, has long been dedicated to continuous improvement and innovation, maintaining a leading position in the advancement of Vacuum Glazing technology for many years. Their unwavering commitment to Research & Development has culminated in the creation of the best performing and most aesthetically pleasing product available.



Vacuum Glazing EU Ltd. proudly serves as one of the primary distributors of LandVac glazing in Europe. LandVac is accessible to manufacturers, glass suppliers, local installers, and the general public through our network of distribution partners across the continent. Whether for refurbishment or complete replacement, these companies possess extensive knowledge of the product and have established networks to ensure your glazing is delivered efficiently and cost-effectively.